


Remote Connection


1. Ensure that an Ethernet connection to the internet is available. The connection must allow the ChipCHECK to access TeamViewer (i.e. make sure either that there is no firewall, or that TeamViewer is accessible through the firewall).




2. Turn on the ChipCHECK unit and access Maintenance Mode (enter the Maintenance Mode code via the Welcome Screen).

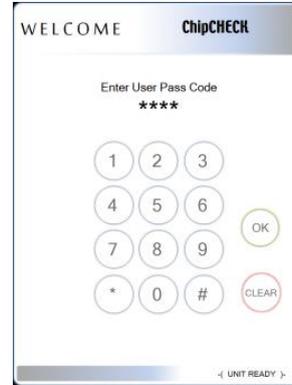

3. From Maintenance Mode, minimize the ChipCHECK software.

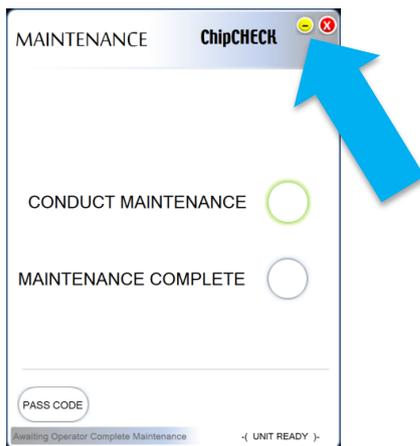

4. From File Explorer, navigate to the "C:/ChipCHECK Tools" folder. The TeamViewerQS.exe file should be visible.

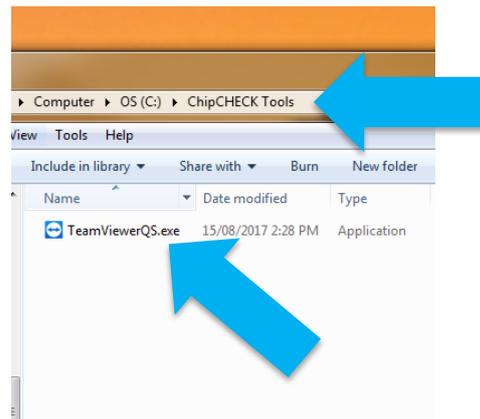

5. Plug the USB to Ethernet adapter (use the adapter supplied with the unit) directly into the ChipCHECK USB port (not a USB hub!). Then plug the Ethernet cable into the adapter.



6. Start the TeamViewerQS.exe application, and then provide the "Your ID" and "Password" values to Gastops customer support. Leave the ChipCHECK plugged into the internet.

